




# Access Permit Application

## Driveway Spacing

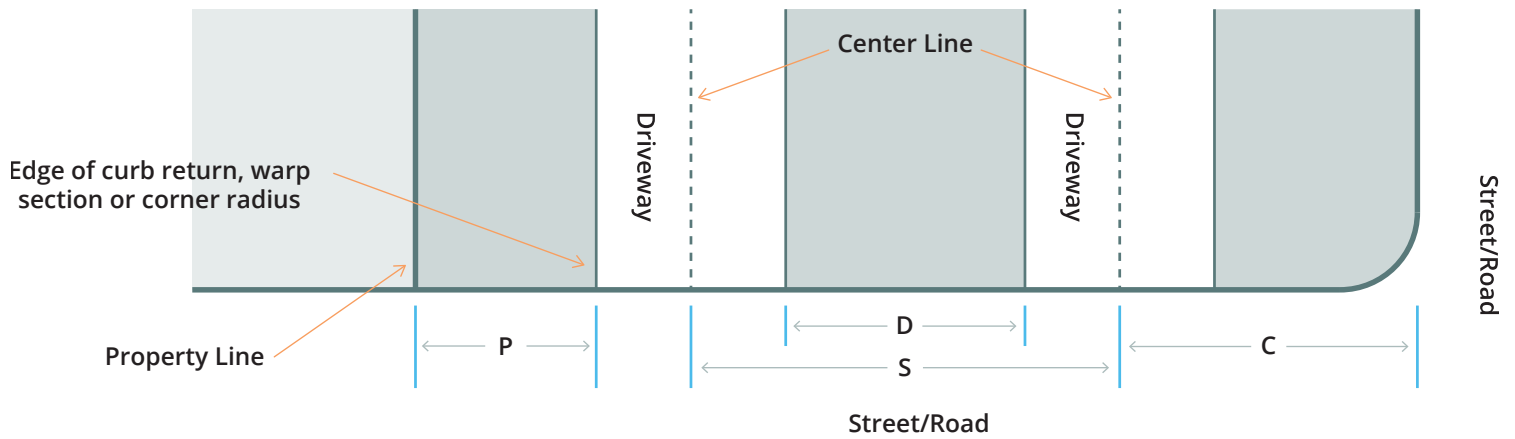

- P** The distance from a property line to the nearest edge of a driveway
- D** The narrowest distance between two driveways
- S** The distance between the center lines of two driveways
- C** The distance from the edge of a street or road to the center line of a driveway

| Residential Driveways  | Figure Reference | Distance |
|--|------------------|----------|
| From property lines  | P                | 0'       |
| From streets/roads   | C                | 30'      |
| Between driveways  | N/A              | 0'       |
| On local streets/roads   | D                | 10'      |
| On collector streets/roads                                       | S                | 80' *    |
| On major collector/arterial streets/roads                        | S                | 325'     |
| Non-Residential Driveways on Locals/Collectors                   | Figure Reference | Distance |
| From property lines  | P                | 0'       |
| From major collectors/arterial streets/roads                     | C                | 300' **  |
| From collector streets/roads                                     | C                | 200' **  |
| From local streets/roads   | C                | 125'     |
| Between Driveways  |                  |          |
| 30 MPH design speed  | S                | 180'     |
| 35 MPH design speed  | S                | 200'     |
| Non-Residential Driveways on Major Collectors/Arterials/Parkways | Figure Reference | Distance |
| From property lines  | P                | 0'       |
| From streets/roads   | C                | 500' *** |
| Between Driveways  |                  |          |
| 40 MPH design speed  | S                | 275'     |
| 45 MPH design speed  | S                | 325'     |

\* May be reduced for circular driveways or driveways with a standard hammerhead turnaround if approved by Planning and Zoning.

\*\* The C dimension may be reduced if approved by Planning & Zoning Division due to the existence of limiting factors. The minimum distance shall be no less than 150 feet.

\*\*\* If the proposed driveway is restricted to right turn movements or if it is not aligned with an existing or planned left turn lane, the C dimension may be reduced if approved by Planning & Zoning Division due to the existence of limiting factors. If signalization is proposed, the minimum C distance shall be increased to 660 feet.

For more information regarding driveway spacing, please refer Section 3.7.6 of the **Transportation Design & Construction Manual**.